




EXTERIOR FLUSH-MOUNT STORM DOORS

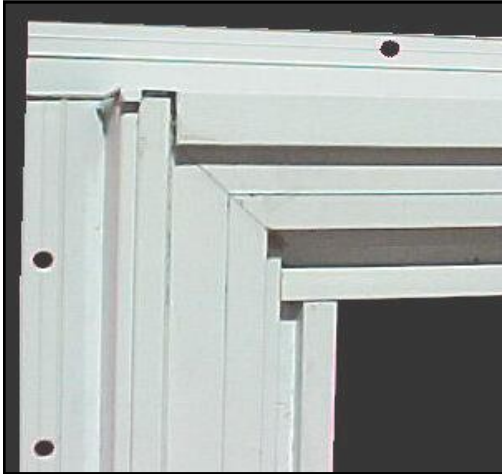

Our flush-mount storm doors are designed mount to the outside of a metal clad jamb for our residential doors (see page 10) *Available in white frame only! Ready to install. Hardware, sealant tape and screws are not included.

◀ A picture of the top inside corner.

Note: "Call size" refers to the stud-to-stud rough opening in the wall, not the door itself! For help on determining call size, see page 3.


For Storm Door Hardware see Page 8.

▼ Call Size ▼	White
34 x 76 LH Flush Mount	84144-WFM
34 x 76 RH Flush Mount	84145-WFM
34 x 80 LH Flush Mount	84166-WFM
34 x 80 RH Flush Mount	84167-WFM
36 x 80 LH Flush Mount	84335-W
36 x 80 RH Flush Mount	84336-W
38 x 80 LH Flush Mount	84337-W
38 x 80 RH Flush Mount	84338-W
38 x 82 LH Flush Mount	84339-W
38 x 82 RH Flush Mount	84340-W




The top outside corner of a flush mount storm door.

Upgrade Options ▼

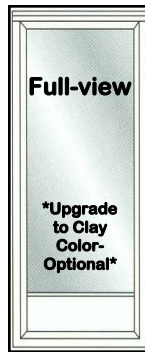

Full-view

Upgrade to Clay Color-Optional

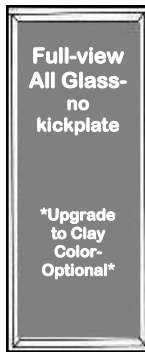

Full-view All Glass-no kickplate

Upgrade to Clay Color-Optional

Shipping Note *Storm Doors must ship by freight unless located within local delivery route area. Please contact us for an exact shipping and handling quote.

DOOR AND WINDOW INSTALLATION ITEMS



We sell a variety of items designed specifically for the installation of exterior doors and windows. Fresh sealant tape, a must for the mounting flanges, can be found on page 76.

Screws could be re-used but we recommend using slightly longer screws, especially if going into older wood in the wall. Screws are on page 76. You may also use silicone as an extra measure of sealant. We feature silicone on page 76. Drip caps of different sizes are featured on page 6. Finally, we offer an all-purpose door/window molding, seen on page 65, for the possible finishing touches needed to fit door and window frames neatly with vinyl siding.

